

5/3 Way Double Pilot Valve





Features

- ▶▶ Heavy & Durable design.
- ▶▶ Aluminum Die Cast Standard Grade with Powder Coating.
- ▶▶ Hard Chrome Plated spool for rust free smooth and long life cycle.
- ▶▶ Superior High Grade Seals
- ▶▶ Simple design easy to maintenance


Technical Specification

Model	3ARMPV-D-502	3ARMPV-D-504
Size	1/4"	1/2"
Orifice	6.5	12.5
Design	Spool type, Internal Pilot Operated (External Pilot On Request)	
Pressure	2.5 to 10 Kg/cm ²	
Temperature	80 °C	
Leakage	Bubble Tight	
Media	Compressed Air (Filtered & Lubricated)	
Flow (NLPM) at 5 BAR	1100	3000
Weight (Kg)	0.620	1.450

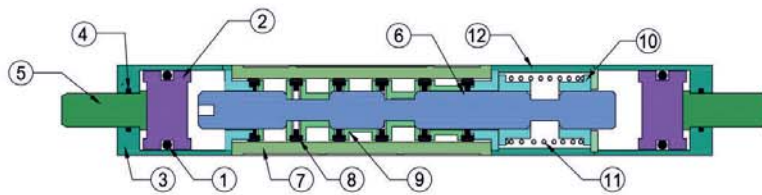

No.	Part Name	Material
1	'O' Ring	Hi - Nitrile
2	Piston	Polyacetal / Aluminum
3	Pilot Cover	Aluminium
4	'O' Ring	Hi - Nitrile
5	Manual Push Button	Steel Plated
6	Spool	Hardchrome Steel Plated
7	Body	Alu. Prs. Die Cast
8	'T' Ring	Hi - Nitrile
9	Cage	Polyacetal
10	Spacer	Aluminum
11	Spring	S.S
12	Cover	Aluminum

Size : 1/4" BSP (Dimensions are in mm)

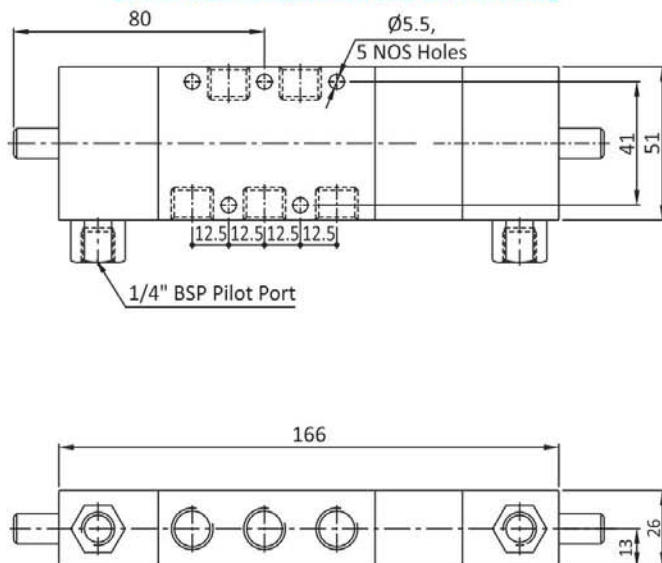

Size : 1/2" BSP (Dimensions are in mm)

